




**P-DUKE**  
**POWER**

# AC/DC Power Supplies DC/DC Converters

Product Portfolio

*Innovative Power for your Visions.*

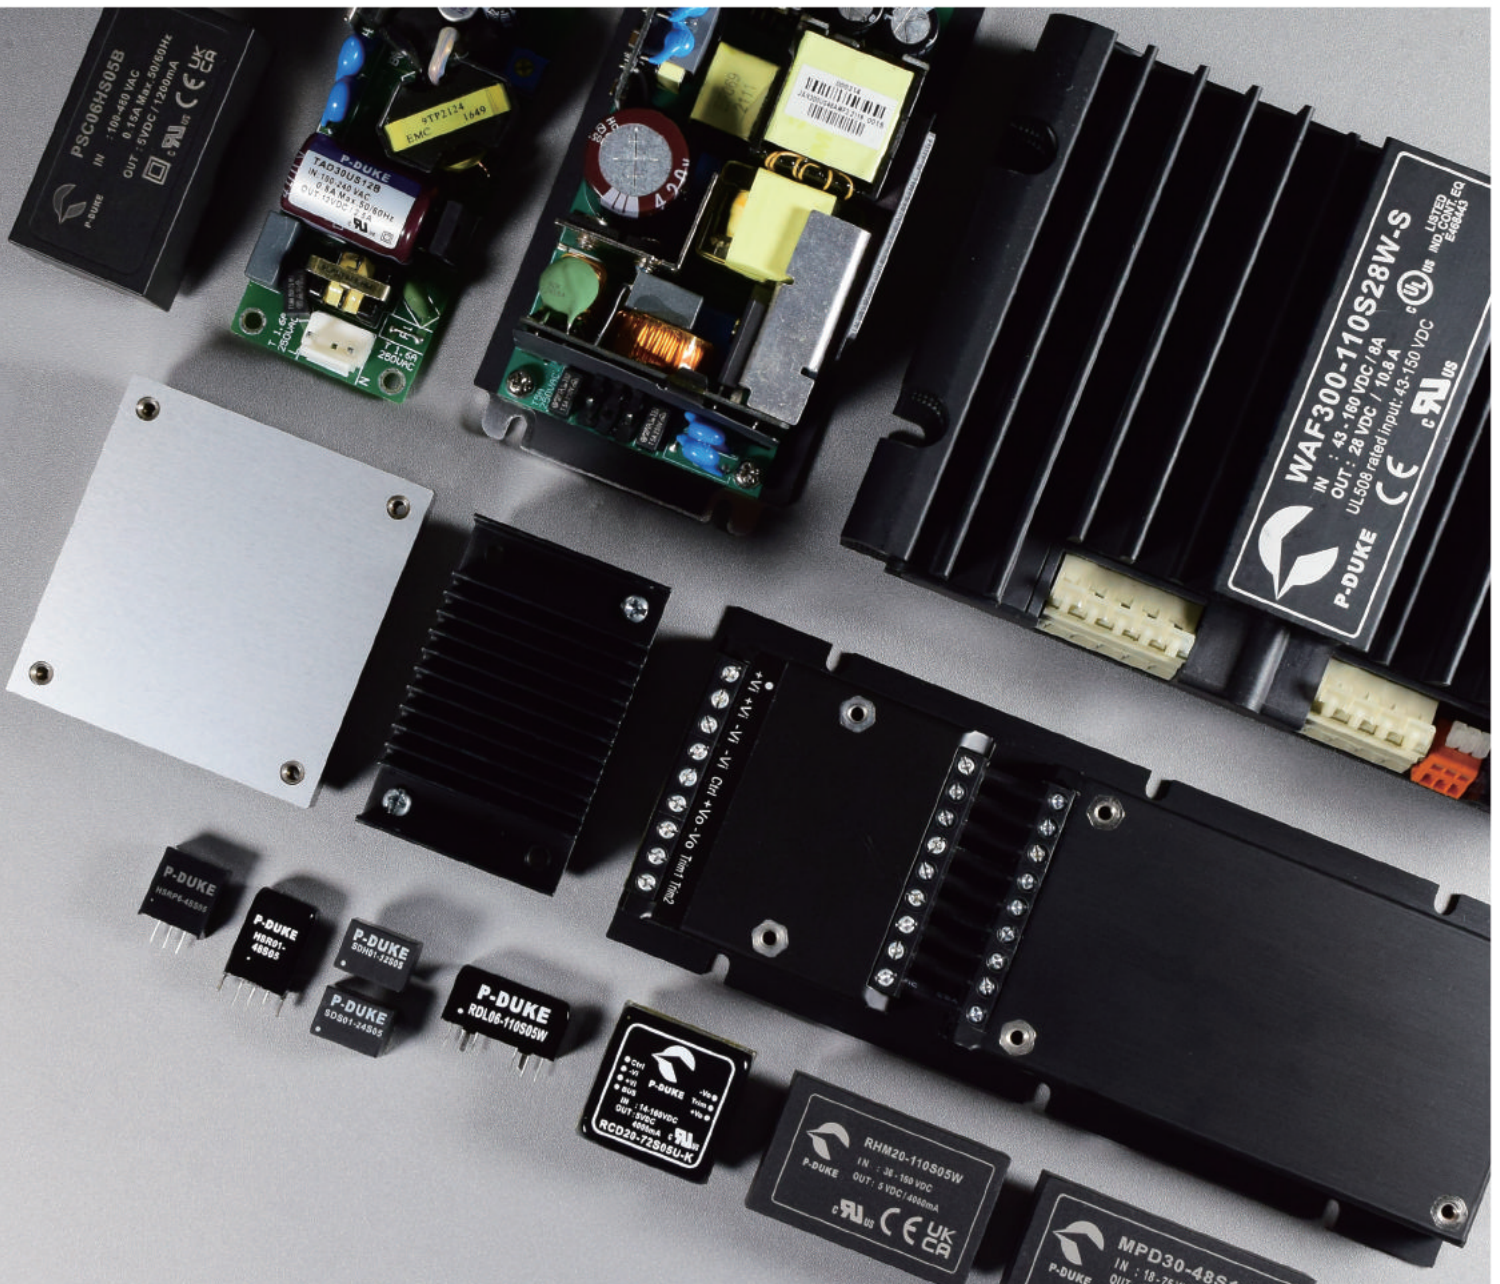

# COMPANY PROFILE

## Expanding Your Vision Leading Your Future

P-DUKE is a Taiwan based company founded in 1992, that is fully committed to research & development and the production of high-performance power conversion products. P-DUKE offers a broad range of DC/DC converters, AC/DC power supplies as well as custom power conversion solutions. With the main focus on both railway and medical markets, where the highest product quality and compliance to all relative application standards is required, P-DUKE 's main business is in Europe, America and Asia Pacific.

## Powering The World The Innovator of Power Solutions

Accumulating over 30 years experience in the power conversion field has allowed P-DUKE to become the leading manufacturer in the low-power conversion market. The company has a strong technical team that provides prompt and professional support in power relevant system design issues which are, for example, choosing optimal power solutions or suggestions for EMI circuits, etc.

### Subsidiary Company California, USA



### World Headquarters Taichung, Taiwan

Capital:	US\$ 25,000,000
Employee:	270
Main Business:	AC/DC Power Supplies DC/DC Converters Customized Solutions *Modifications & Extensions



### Wuxi, China

Area:	40,000 square meters
Capacity:	530k pcs transformers/M 1,200k pcs inductors/M
Employee:	280
Production Line:	45



**1992**

POWER MATE Technology Co., Ltd. was founded



**2005**

Investigation and developing customized products for railway applications

**2010**

Developing and launch new standard ruggedized products dedicated for railway applications



**2012**

Developing and launch new state of the art AC/DC and DC/DC standard products dedicated for medical applications



**2016**

Company name was changed to P-DUKE Technology Co., Ltd.



**2021**

Construction work on the new extension building begun



## Various Applications in the High-tech Industry Exploring any Possibilities in each Application Field

We are experts in reliable and highly efficient power converter solutions with best thermal management. We continuously explore the possibilities and opportunities to cooperate with our valued customers. Providing the best power converter solutions to our customer's applications with years of experiences and know-how. We always view our customer's requirements and our product quality as our first priority. To fulfil the requirements of any application, we have certified our products to the latest international safety and EMI/EMC standards and their relevant approvals.



ISO 9001  
ISO 13485  
ISO 14001  
ISO 45001



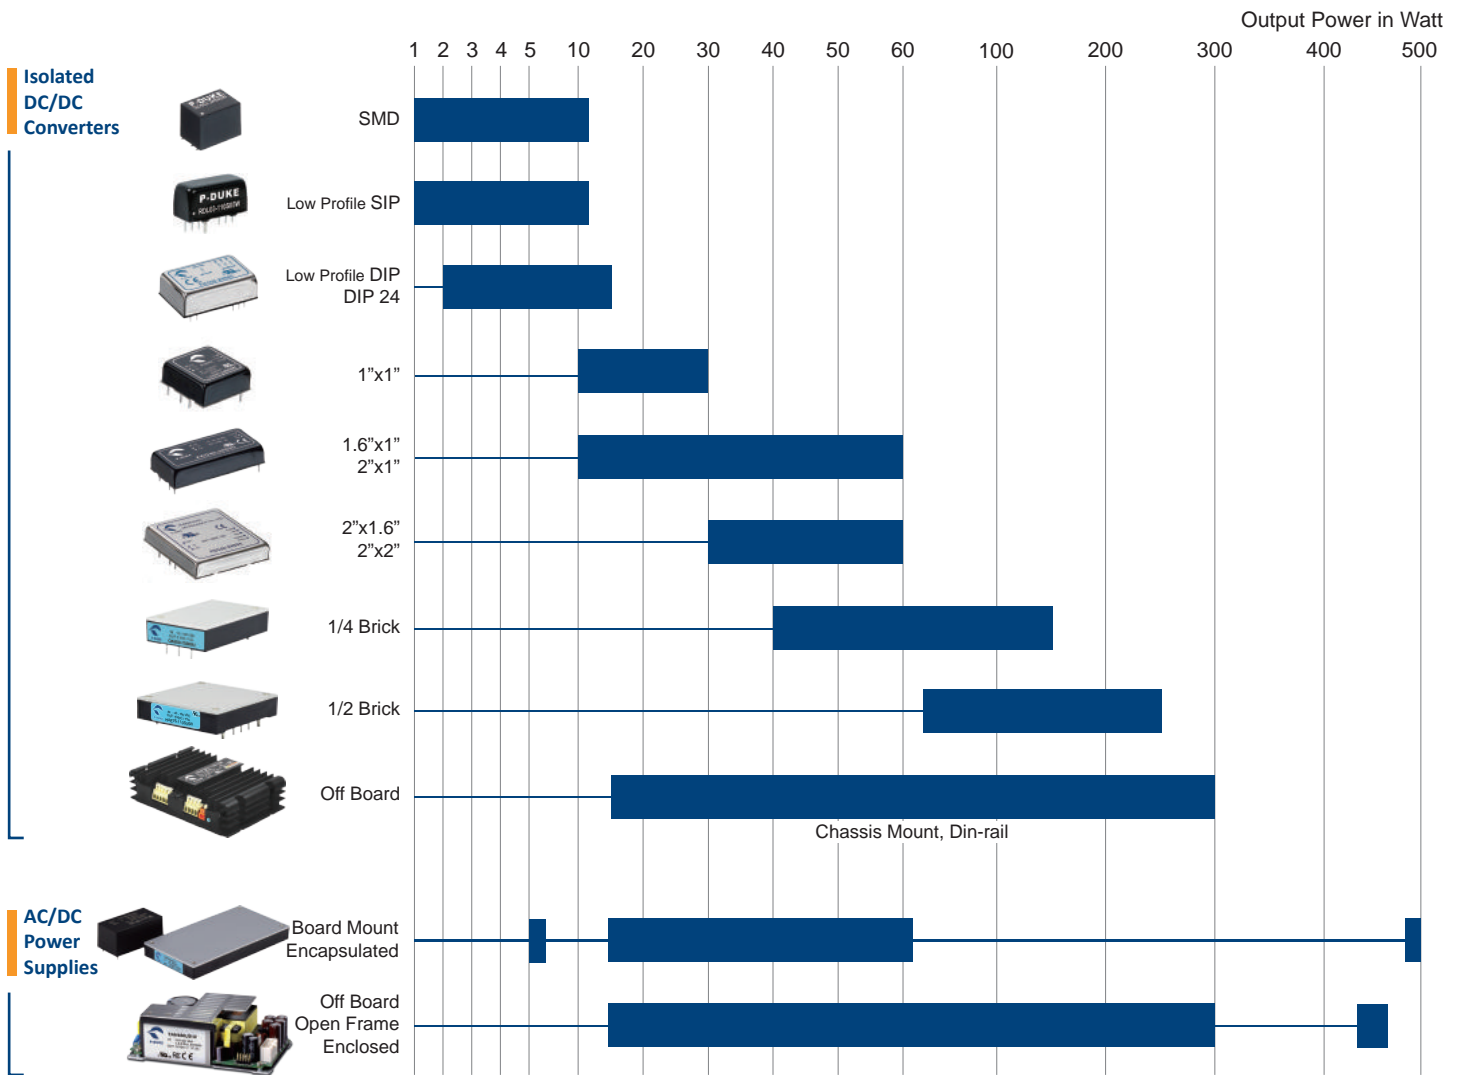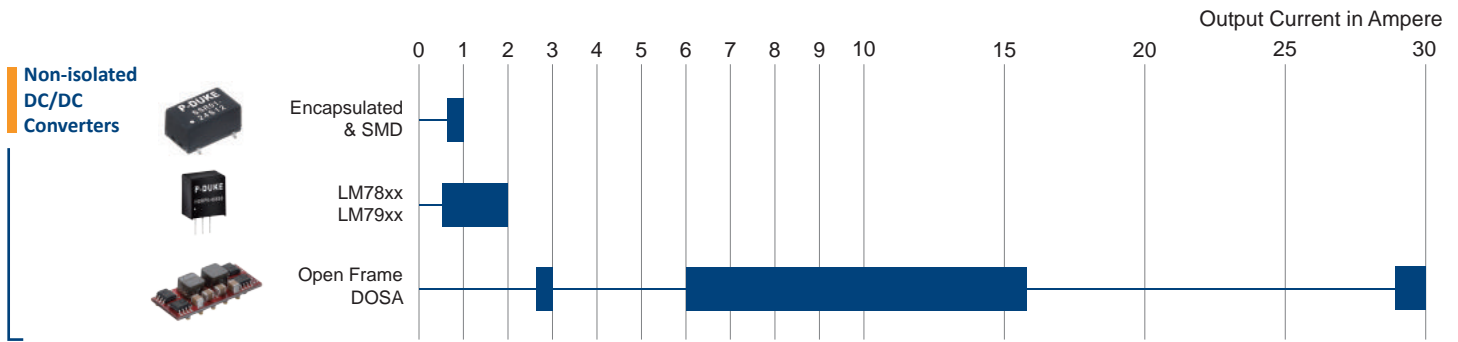


\*JST, Molex, and screw terminal block are available for AC/DC, please see datasheet for further information.

# RAILWAY




IEC 62368-1 | EN 50155 : 2017 | EN 45545-2 | EN 61373

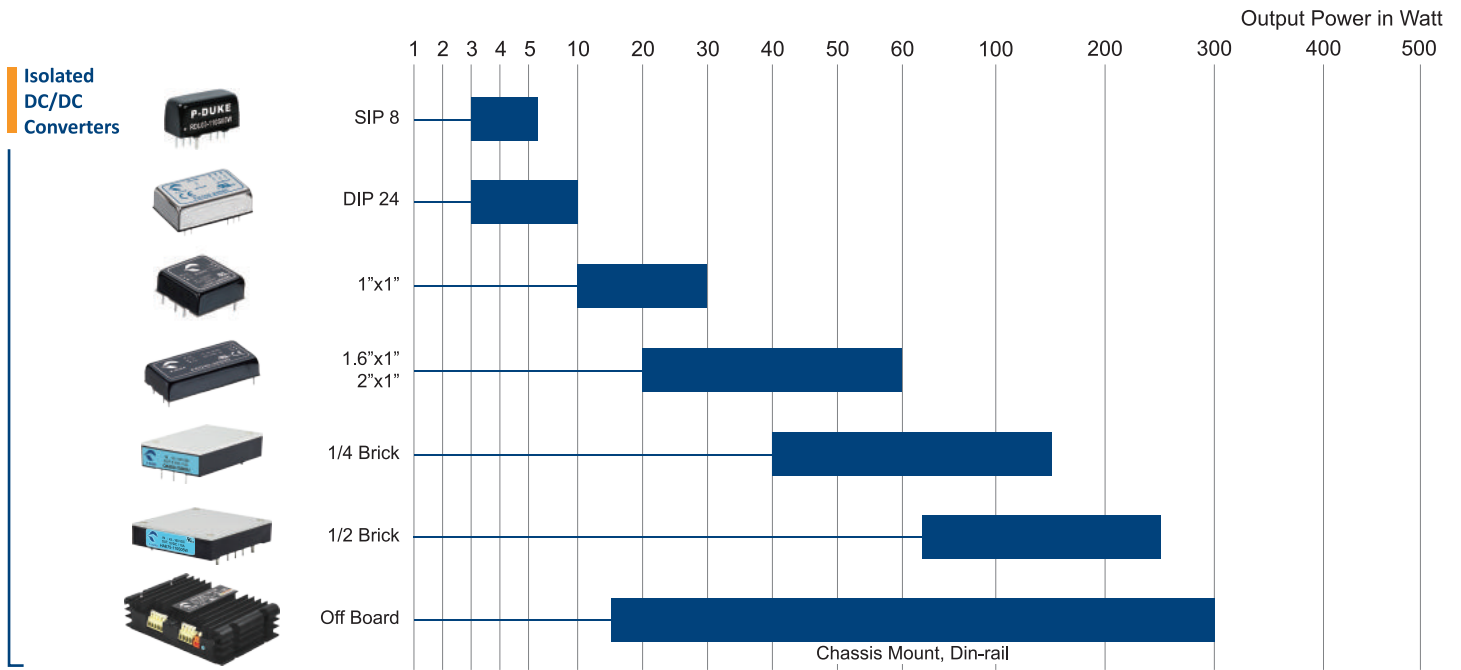


# MEDICAL



IEC 62368-1 | IEC 60601-1 Edition 3.1 | IEC 60601-1-2 4th Edition | ISO 13485 | ISO 14971

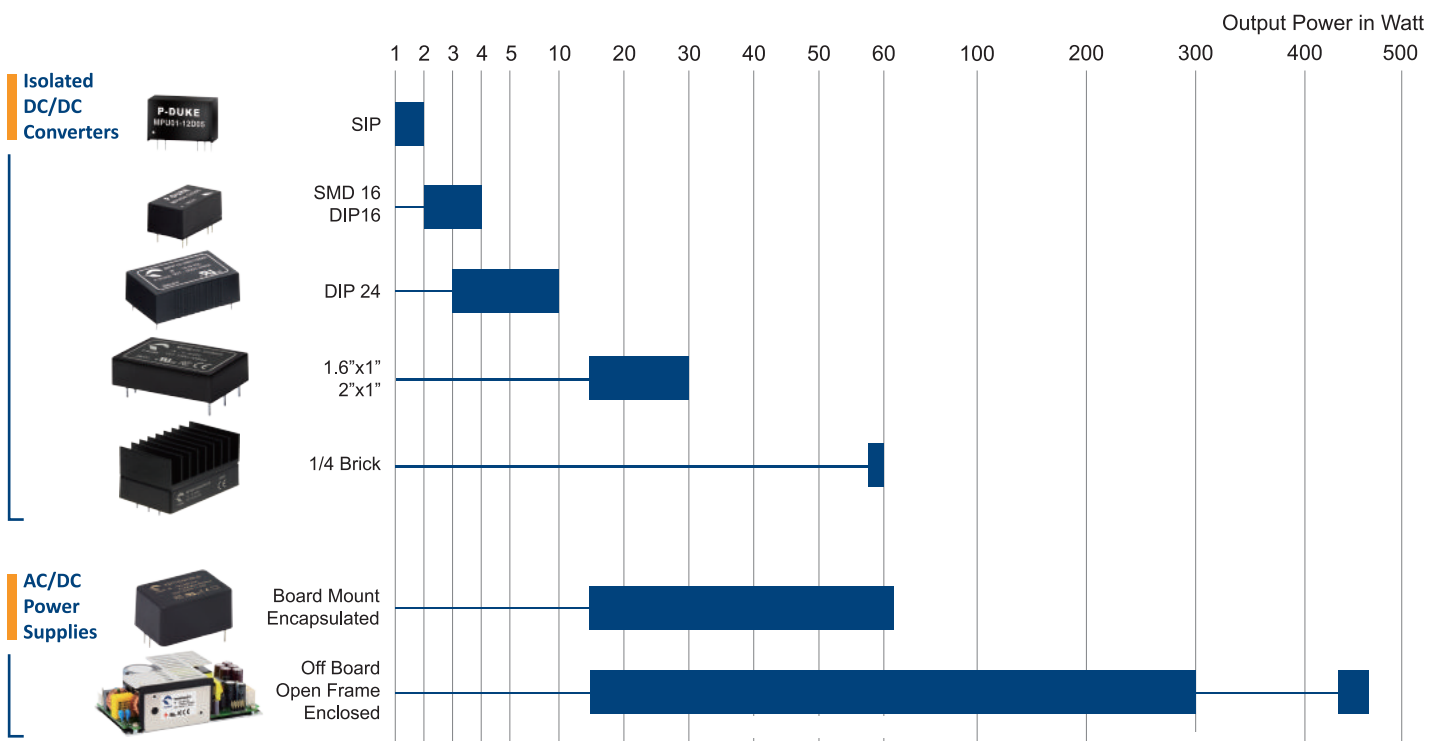


\*JST, Molex, and screw terminal block are available for AC/DC, please see datasheet for further information.

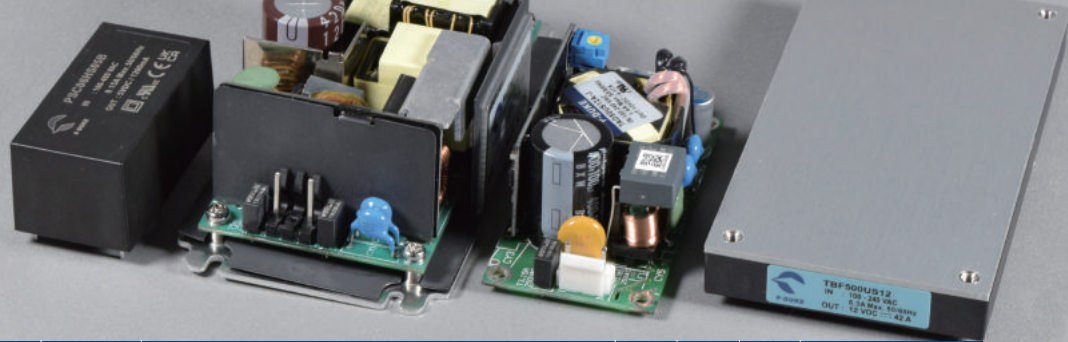

Series	Open Frame Enclosed Encapsulated	Pin Connection Type	Output Power (W)		Input Voltage (VAC)	Single Output Dual Output Triple Output	Output Voltage											Eff. (%)	OCV III	Isolation Voltage (VAC)	Dimensions (Inch)		
			Con.	Peak			3.3 Vout	5.0 Vout	7.5 Vout	9.0 Vout	12 Vout	15 Vout	18 Vout	24 Vout	28 Vout	36 Vout	48 Vout				53 Vout	54 Vout	L
PSC06		● ●	6		85 – 530	●	●	●	●	●								75	●	4000	2.07	1.08	0.91
TSC15		● ●	15		85 – 264	●	●	●	●	●	●	●	●	●	●	●	●	89		3000	2.82	1.14	0.82
TSD30		● ●	30			●	●	●	●	●	●	●	●	●	●	●	●	91.5			3.95	1.50	1.00
TSD30-P		● ●	30	40		●	●	●	●	●	●	●	●	●	●	●	●	91.5			3.95	1.50	1.00
TSD40		● ●	40			●	●	●	●	●	●	●	●	●	●	●	●	93	●		4.30	2.20	1.20
TSD65		● ●	65			●	●	●	●	●	●	●	●	●	●	●	●	93.5	●		4.30	2.20	1.20
TAC15	●		15			●	●	●	●	●	●	●	●	●	●	●	●	89			2.61	1.00	0.62
TAD30	●		30			●	●	●	●	●	●	●	●	●	●	●	●	91.5			3.34	1.36	0.77
TAD30-P	●		30	40		●	●	●	●	●	●	●	●	●	●	●	●	91.5			3.34	1.36	0.77
TAD40 Single	● ●		40			●	●	●	●	●	●	●	●	●	●	●	●	93	●		3.00	2.00	0.94
TAD65 Single	● ●		65			●	●	●	●	●	●	●	●	●	●	●	●	93.5	●		3.00	2.00	0.94
TAD65-P	● ●		65	90		●	●	●	●	●	●	●	●	●	●	●	●	93.5	●		3.00	2.00	0.94
TAD40 Multi	● ●		40			● ● ●	● ●		● ●		● ●							90	●		3.50	2.00	0.98
TAD65 Multi	● ●		65			● ● ●	● ●		● ●		● ●							90.5	●		3.50	2.00	0.98
TAD50	●		50	70		●	●	●	●	●	●	●	●	●	●	●	●	92.5	●		3.00	1.50	1.18
TAD100	● ●		100			●			● ●		● ●		● ●					92	●		3.00	2.00	1.16
TAD125	● ●		125	150		●			● ●		● ●		● ●					92	●		3.00	2.00	1.16
TAF150	● ●		150			●			● ●		● ●		● ●					92	●		4.00	2.00	1.16
TAD180	● ●		180	220		●			● ●		● ●		● ●		● ●			94	●		3.00	2.00	1.24
TAF300	● ●		300	360	●			● ●		● ●		● ●		● ●			93	●	4.00	2.09	1.26		
TAH450	● ●		450		●			● ●		● ●		● ●		● ●			94		5.00	3.00	1.58		
TBF500		● ●	500		●			● ●		● ●		● ●		● ●			93	●	4.60	2.40	0.50		

# NON-ISOLATED DC/DC CONVERTERS

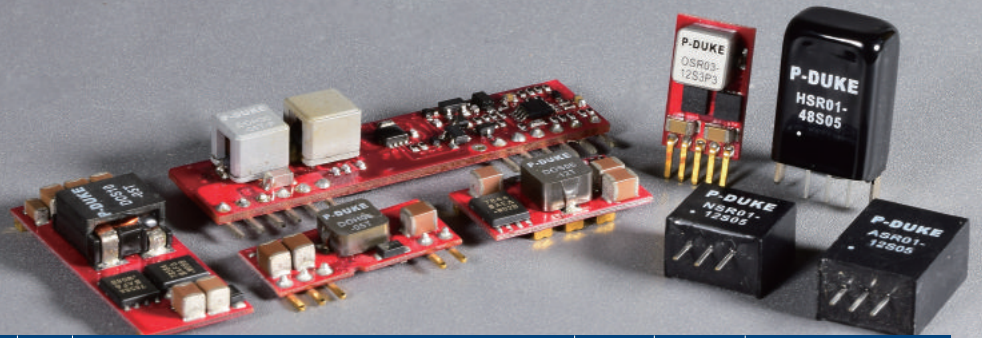

Series	Open Frame Encapsulated SMD Type Thru-hole Type	Output Current (A)	Input Voltage (VDC)	Negative Vout Available	Output Voltage												Eff. (%)	Isolation Voltage	Dimensions (Inch)					
					1.2 Vout	1.5 Vout	1.8 Vout	2.5 Vout	3.0 Vout	3.3 Vout	5.0 Vout	5.2 Vout	6.0 Vout	6.5 Vout	8.0 Vout	9.0 Vout			12 Vout	15 Vout	24 Vout	L	W	H
HSRP6	● ●	0.6	9 – 72							● ●									94	None	0.47	0.34	0.53	
HSR01	● ●	1	9 – 72							● ●									93		0.48	0.34	0.69	
ASR01	● ●	1	-7 – -32		○							○ ○		○ ○	○ ○	○ ○			96		0.46	0.30	0.65	
NSR01	● ●	1	4.6 – 36	●	● ● ● ● ● ● ● ●							● ●		● ● ● ●					95.5		0.46	0.30	0.40	
PSR1.0	● ●	1	4.6 – 36		● ● ● ● ● ● ● ●							● ●		● ● ● ●					96		0.46	0.30	0.40	
LSR01	● ●	1	3.0 – 36		● ● ● ● ● ● ● ●							● ●		● ● ● ●					96		0.60	0.37	0.30	
SSR01	● ●	1	3.0 – 36	●						● ●				● ● ● ●					95.5		0.60	0.37	0.30	
PSR02	● ●	2	3.0 – 36		● ● ● ● ● ● ● ●							● ●		● ● ● ●					96		0.55	0.30	0.40	
OSR03	● ●	3	2.5 – 30	●														0.59 – 15 VDC	95		0.37	0.24	0.61	
DOS/H06	● ● ● ●	6	2.4 – 5.5 8.3 – 14															0.75 – 5.0 VDC	94		0.80	0.45	0.25	
DOS/H10	● ● ● ●	10																	0.75 – 5.0 VDC		95	1.30	0.53	0.30
DOS/H16	● ● ● ●	16																	0.75 – 5.0 VDC		95	1.30	0.53	0.30
DOS/H30	● ● ● ●	30		4.5 – 14															0.8 – 5.5 VDC		93	1.30	0.53	0.31


○ : Negative Output Voltage

# DC/DC FRONT-END FILTERS



Series	Surge Protection EMI Filter	Footprint	Output Power (W)	Vnom (VDC)	Input Voltage (VDC)	Max. Transient Voltage	Clamp Voltage (VDC)	Standard	Dimensions (Inch)		
									L	W	H
SSM-110P50-001	●	DIP-24	20	110	43 – 160	385 V / 20 ms	168	RIA 12 Surge Susceptibility NF F 01-510	1.25	0.80	0.40
SSM-110004-001	●	1.6"x1"	150	110	43 – 160				1.60	1.00	0.40
SSM-110008-001	●		300	110	43 – 160				1.60	1.00	0.40
MCF-028005-001	● ●	1.6"x1"	45	28	9 – 36	100 V / 50 ms	40	RIA 12 Surge Susceptibility NF F 01-510 MIL-STD 1275D MIL-STD 461G	1.60	1.00	0.40
MCF-028015-001	● ●	1/4 Brick	250	28	9 – 36				2.28	1.45	0.50



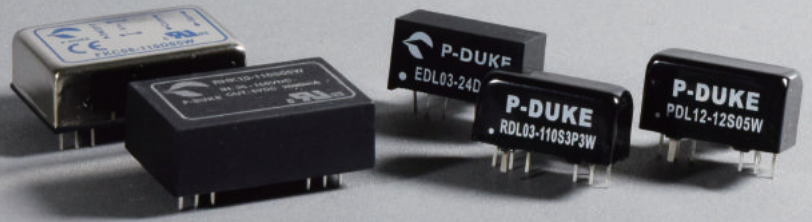

SIP-8 | SMD-24 | DIP-24

Series	Footprint	Output Power (W)	Input Ratio			Input Voltage (VDC)	Single Output	Dual Output	Triple Output	Output Voltage											Eff. (%)	Isolation Voltage	Dimensions (Inch)					
			12:1/ 8:1	4:1	2:1					3.3 Vout	5.0 Vout	5.1 Vout	9.0 Vout	12 Vout	15 Vout	24 Vout	48 Vout	53 Vout	±5 Vout	±12 Vout			±15 Vout	±24 Vout	L	W	H	
EDL02	SIP-8	2	●		4.5 – 13.2 9 – 18	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	1600 VDC	0.86	0.36	0.44	
EDL03		3	●		18 – 36 36 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					
EDL02W		2	●		4.5 – 18 9 – 36	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					82
EDL03W		3	●		18 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					83
LDL03		3	●		4.5 – 13.2 9 – 18 18 – 36 36 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	85				1600 VDC
PDL02		2	●		4.5 – 9 9 – 18	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	84				3000 VDC
PDL03		3	●		18 – 36	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	85				1600 VDC
PDL06		6	●		36 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	86				
PDL09		9	●		9 – 18 18 – 36 36 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	90				1600 VDC
PDL03W		3	●		4.5 – 18 9 – 36 18 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	82				3000 VDC 1600 VDC
PDL06W		6	●		9 – 36 18 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	88				3000 VDC 1600 VDC
PDL09W		9	●			● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	89				1600 VDC
PDL12W		12	●		4.5 – 18 9 – 36 18 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	90				1600 VDC
RDL03W		3	●		9 – 36 18 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	83				3000 VDC
RDL06W	6	●		43 – 160	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	88					
FKC03	DIP-24 SMD-24	3	●		9 – 18 18 – 36 36 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	82	1600 VDC	1.25	0.80	0.40	
FKC05		5	●			● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					84
FKC08		8	●			● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					88
FKC12		12	●			● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					88
FKC15		15	●			● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					91
FKC05W		5	●		9 – 36 18 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	84					
FKC08W		8	●		9 – 36 18 – 75 43 – 160	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	88					
FKC12W		12	●		9 – 36 18 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	88					
FKC15W		15	●			● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	90					
LKC05W		5	●		4.5 – 12 9 – 36 18 – 75	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	89					
RHK03W	DIP-24	3	●		36 – 160	● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	85	3000 VAC				
RHK06W		6	●			● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	86.5					
RHK10W		10	●			● ●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	88					



# ISOLATED DC/DC CONVERTERS



Industrial

1"x1"



Series	Footprint	Output Power (W)	Input Ratio			Input Voltage (VDC)	Output Voltage													Eff. (%)	Isolation Voltage	Dimensions (Inch)								
			12:1/8:1	4:1	2:1		Single Output	Dual Output	Triple Output	2.5 Vout	3.3 Vout	5.0 Vout	5.1 Vout	9.0 Vout	12 Vout	15 Vout	24 Vout	53 Vout	±5 Vout			±12 Vout	±15 Vout	±24 Vout	L	W	H			
LCD10	1"x1"	10		●			●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	1600 VDC	1.00	1.00	0.39	
LCD15		15		●		9 – 18 18 – 36 36 – 75	●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●	●					●
LCD20		20		●				●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					●
LCD30		30		●				●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					●
LCD10W		10		●				●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					●
LCD15W		15		●		9 – 36 18 – 75		●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					●
LCD20W		20		●				●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					●
LCD30W		30		●				●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					●
RCD15		15			●	9 – 18 18 – 36 36 – 75		●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					3000 VDC 1600 VDC
RCD10W		10		●				●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					3000 VDC
RCD15W		15		●		9 – 36 18 – 75		●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					3000 VDC
RCD20W		20		●		36 – 160		●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					3000 VDC 2250 VDC
RCD30W		30		●				●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					3000 VDC
RCD10U		10		●		9 – 75 14 – 160		●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●					3000 VDC
RCD20U	20		●				●	●		●	●		●	●	●	●	●	●	●	●	●	●	●	●	3000 VDC					
LED15	15			●	18 – 36 36 – 75		●						●	●											2250 VDC	1.10	0.94	0.33		
LED15W	15		●		9 – 36 18 – 75		●			●	●		●	●											2250 VDC	1.10	0.94	0.33		





# ISOLATED DC/DC CONVERTERS



Industrial



Quarter Brick | Half Brick

Series	Footprint	Output Power (W)	Input Ratio			Input Voltage (VDC)	Single Output	Dual Output	Triple Output	Output Voltage										Eff. (%)	Isolation Voltage	Dimensions (Inch)					
			12:1/8:1	4:1	2:1					3:3 Vout	5:0 Vout	5:1 Vout	1:2 Vout	1:5 Vout	2:4 Vout	2:8 Vout	3:0 Vout	4:8 Vout	5:3 Vout			±5 Vout	±12 Vout	±15 Vout	±24 Vout	L	W
QAE40U	1/4 Brick	40	●				●			●	●	●	●	●	●	●	●	●	●	●	●	●	91	3000 VAC 2250 VDC	2.28	1.45	0.50
QAE60U		60	●			9 – 75 14 – 160	●			●	●	●	●	●	●	●	●	●	●	●	●	●	91				
QAE100U		100	●				●			●	●	●	●	●	●	●	●	●	●	●	●	●	90				
QAE100		108	●	●		8.5 – 22 16.5 – 36	●			●	●	●	●	●	●	●	●	●	●	●	●	●	93	2250 VDC			
QAE150		150	●	●		33 – 75	●			●	●	●	●	●	●	●	●	●	●	●	●	●	92				
QAE100W		90	●	●		8.5 – 36 16.5 – 75	●			●	●	●	●	●	●	●	●	●	●	●	●	●	90	3000 VAC 2250 VDC			
QAE150W		132	●	●		40 – 160	●			●	●	●	●	●	●	●	●	●	●	●	●	●	90				
HAE100	1/2 Brick	100	●	●		9 – 18 18 – 36 36 – 75	●			●	●	●	●	●	●	●	●	●	●	●	●	93	3000 VDC	2.40	2.28	0.50	
HAE150		196	●	●		8.5 – 22 16.5 – 36	●			●	●	●	●	●	●	●	●	●	●	●	●	93					
HAE200		255	●	●		33 – 75	●			●	●	●	●	●	●	●	●	●	●	●	●	93					
HAE75W		75	●	●		9 – 36 18 – 75 43 – 160	●			●	●	●	●	●	●	●	●	●	●	●	●	91	3000 VAC 3000 VDC				
HAE100W		100	●	●		8.5 – 36	●			●	●	●	●	●	●	●	●	●	●	●	●	93					
HAE150W		182	●	●		16.5 – 75 43 – 160	●			●	●	●	●	●	●	●	●	●	●	●	●	91					
HAE200W		240	●	●			●			●	●	●	●	●	●	●	●	●	●	●	●	91					
HAE150U		150	●	●		16 – 160	●			●	●	●	●	●	●	●	●	●	●	●	●	●	93				3000 VAC
HAE200U		200	●	●			●			●	●	●	●	●	●	●	●	●	●	●	●	●	93				

# ISOLATED DC/DC CONVERTERS



Industrial



Chassis Mount | Din-rail

Series	Footprint	Output Power (W)	Input Ratio			Input Voltage (VDC)	Output Voltage													Eff. (%)	Isolation Voltage	Dimensions (Inch)									
			12:1/ 8:1	4:1	2:1		Single Output	Dual Output	Triple Output	3:3 Vout	5:0 Vout	5:1 Vout	12 Vout	15 Vout	24 Vout	28 Vout	30 Vout	48 Vout	53 Vout			+5 Vout	+12 Vout	+15 Vout	+24 Vout	L	W	H			
UFED20	*Chassis Din-rail	20		●		9.5 – 18	●	●																		1600 VDC	4.00	2.25	0.75		
UFEC30		30		●		18 – 36	●	●																							
UFEC40		40		●		36 – 75	●	●	●																						
UFEC60		60		●		18 – 36 36 – 75	●																								
UFEC15W		15		●		9.5 – 36	●	●																							
UFED20W		20		●		18 – 75	●	●																							
URED20W		20		●		9 – 36 18 – 75 43 – 160	●	●																							2250 VDC
UFEC30W		30		●		10 – 40 18 – 75	●	●																							1600 VDC
UFED40W		40		●		9.5 – 36 18 – 75 43 – 160	●	●																							3000 VDC 1600 VDC
UFEC40W		40		●		9.5 – 36 18 – 75	●	●																							1600 VDC
HAE100-T	*Chassis	100		●		9 – 18 18 – 36 36 – 75	●																			3000 VDC	3.35	2.40	1.59		
HAE150-T		196		●		8.5 – 22 16.5 – 36	●																								
HAE200-T		255		●		33 – 75	●																								
HAE75W-T		75		●		9 – 36 18 – 75 43 – 160	●																								
HAE100W-T		100		●		8.5 – 36	●																								3000 VAC 3000 VDC
HAE150W-T		182		●		16.5 – 75 43 – 160	●																								
HAE200W-T		240		●			●																								
WAF150W		*Chassis	150		●		9 – 36 18 – 75 43 – 160	●																							3000 VDC 2250 VDC
WAF300W	*Chassis Din-rail	300		●		18 – 75 43 – 160	●																			3000 VAC	6.00	4.00	1.52		

\*Chassis: Chassis mount



Series	Footprint	Output Power (W)	Input Ratio			Input Voltage (VDC)	Output Voltage													Eff. (%)	Isolation Voltage	Dimensions (Inch)							
			12:1/ 8:1	4:1	2:1		Single Output	Dual Output	3.3 Vout	5.0 Vout	5.1 Vout	9.0 Vout	12 Vout	15 Vout	24 Vout	28 Vout	30 Vout	48 Vout	53 Vout			±5 Vout	±12 Vout	±15 Vout	±24 Vout	L	W	H	
RDL03W	SIP-8	3	●		9 – 36	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	83	3000 VDC	0.86	0.36	0.44
RDL06W		6	●		18 – 75 43 – 160	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	87				
FKC08W	DIP-24	8	●		36 – 160	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	88	1600 VDC	1.25	0.80	0.40	
RHK03W		3	●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					85
RHK06W		6	●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					86.5
RHK10W		10	●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					88
RCD10W	1"x1"	10	●		9 – 36 18 – 75 36 – 160	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	90	3000 VDC	1.00	1.00	0.39	
RCD15W		15	●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					91
RCD20W		20	●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	91				3000 VDC 2250 VDC
RCD30W		30	●			● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	92				
RCD10U		10	●		9 – 75	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	88	3000 VDC				
RCD20U		20	●		14 – 160	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	88					
RHM20W	1.6"x1"	20	●		36 – 160	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	90.5	3000 VAC	1.60	1.00	0.40	
RED20W	2"x1"	20	●		9 – 36 18 – 75 43 – 160	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	89	2250 VDC	2.00	1.00	0.40	
RED40W		40	●		9 – 36 18 – 75 36 – 160	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	93					3000 VDC
RED60W		60	●		● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	94					
RHD40W		40	●		36 – 160	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	90	3000 VAC				
RED40U		40	●		9 – 75 14 – 160	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	90	3000 VDC				
QAE40U	1/4 Brick	40	●		9 – 75 14 – 160	●	●	● ● ● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	91	3000 VAC 2250 VDC	2.28	1.45	0.50	
QAE60U		60	●			●	●	● ● ● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					91
QAE100U		100	●			●	●	● ● ● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●					90
QAE100W		90	●		8.5 – 36 16.5 – 75	●	● ●	● ● ● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	90					
QAE150W		132	●		40 – 160	●	● ●	● ● ● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	90					



**POWER SOLUTIONS  
FOR  
MEDICAL  
APPLICATIONS**  
AC/DC Power Supplies



Series	Open Frame Enclosed Encapsulated	Pin Connection Type	Output Power (W)		Input Voltage (VAC)	Single Output	Dual Output	Triple Output	Output Voltage												Eff. (%)	Leakage Current (µA)	Isolation Voltage (VAC)	Dimensions (Inch)		
			Con.	Peak					3.3 Vout	5.0 Vout	7.5 Vout	9.0 Vout	12 Vout	15 Vout	18 Vout	24 Vout	28 Vout	36 Vout	48 Vout	53 Vout				54 Vout	L	W
MSC15		● ●	15		85 – 264	●			● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●	89	75	4000	2.82	1.14	0.82											
MSD30		● ●	30	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		91.5	100	3.95	1.50	1.00																
MSD40		● ●	40	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		93	75	4.30	2.20	1.20																
MSD65		● ●	65	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		93.5	75	4.30	2.20	1.20																
MAC15	●		15	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		89	75	2.61	1.00	0.62																
MAD30	●		30	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		91.5	100	3.34	1.36	0.77																
MAD40 Single	● ●		40	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		93	75	3.00	2.00	0.94																
MAD65 Single	● ●		65	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		93.5	75	3.00	2.00	0.94																
MAD40 Multi	● ●		40	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		90	75	3.50	2.00	0.98																
MAD65 Multi	● ●		65	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		90.5	75	3.50	2.00	0.98																
MAD100	● ●		100	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		92	75	3.00	2.00	1.16																
MAF150	● ●		150	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		92	100	4.00	2.00	1.16																
MAD180	● ●		180	220		● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●	94	100	3.00	2.00	1.24															
MAF300	● ●		300	360		● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●	93	100	4.00	2.09	1.26															
MAH450	● ●		450	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●		94	100	5.00	3.00	1.58																

**POWER SOLUTIONS  
FOR  
MEDICAL  
APPLICATIONS**  
DC/DC Converters



Medical

Series	Footprint	Output Power (W)	Input Ratio		Input Voltage (VDC)	Single Output	Dual Output	Output Voltage							Eff. (%)	Leakage Current (µA)	Clearance Creepage (mm)	Isolation Voltage	Dimensions (Inch)									
			4:1	2:1				3.3 Vout	5.0 Vout	5.1 Vout	9.0 Vout	12 Vout	15 Vout	24 Vout					±5 Vout	±12 Vout	±15 Vout	L	W	H				
MPU01	SIP-9	1			4.5 – 5.5 9.6 – 14.4 12 – 18 19.2 – 28.8	● ●	● ●			● ●		● ●	● ● ●	85	2	8	2MOPP 5000 VAC	0.77	0.49	0.39								
MPU02		2			4.5 – 7 9.6 – 14.4 12 – 18 19.2 – 28.8	● ●	● ●			● ●		● ●	● ● ●	84				0.86	0.39	0.40								
MPL02	SIP-8	2	●		4.5 – 12 9 – 18 18 – 36	● ●	● ●			● ●		● ● ●	85	0.95				0.57	0.40									
MPS02	SMD-16 DIP-16	2	●		4.5 – 12 9 – 18	● ●	● ●			● ● ● ●		● ● ●	82	2				8	2MOPP 5000 VAC	1.25	0.80	0.40						
MPS04 MPH04		3.5	●		18 – 36 36 – 75	● ●	●			● ● ● ●		● ● ●	83															
MPP03	DIP-24	3	●		4.5 – 9 9 – 18 18 – 36 36 – 75	● ●	● ●			● ● ● ●		● ● ● ●	87										2	8	2MOPP 5000 VAC	1.25	0.80	0.40
MPP06		6	●		4.5 – 9 9 – 18 18 – 36 36 – 75	● ●	● ●			● ● ● ●		● ● ● ●	89															
MPK06		6	●		4.5 – 9 9 – 18 18 – 36 36 – 75	● ●	●			● ● ● ●		● ● ● ●	87															
MPP10		10	●		4.5 – 9 9 – 18 18 – 36 36 – 75	● ●	● ●			● ● ● ●		● ● ● ●	89															
MPP03W		3	●		9 – 36 18 – 75	● ●	● ●			● ● ● ●		● ● ● ●	87															
MPP06W		6	●		9 – 36 18 – 75	● ●	● ●			● ● ● ●		● ● ● ●	89															
MPP10W		10	●		9 – 36 18 – 75	● ●	● ●			● ● ● ●		● ● ● ●	89															
MPM15	1.6"x1"	15	●		9 – 18 18 – 36 36 – 75	● ●	●			● ● ● ●		● ● ● ●	90										2	8	2MOPP 5000 VAC	1.60	1.00	0.40
MPM20		20	●		9 – 18 18 – 36 36 – 75	● ●	●			● ● ● ●		● ● ● ●	90															
MPM15W		15	●		9 – 36 18 – 75	● ●	●			● ● ● ●		● ● ● ●	89.5															
MPM20W		20	●		9 – 36 18 – 75	● ●	●			● ● ● ●		● ● ● ●	89															
MPD30	2"x1"	30	●		9 – 18 18 – 36 36 – 75	● ●	●			● ● ● ●		● ● ● ●	90.5	2	8	2MOPP 5000 VAC	2.00	1.00	0.40									
MPD30W		30	●		9 – 36 18 – 75	● ●	●			● ● ● ●		● ● ● ●	90.5															
MPQ60W	1/4 Brick	60	●		9 – 36 18 – 75	● ●	● ●			● ● ● ●		● ● ● ●	92.5	4.5	8		2.28	1.45	0.50									





## World Headquarters



P-DUKE Technology Co., Ltd.  
NO.36, 22nd Rd., Taichung Industrial Park, Taichung,  
40850, Taiwan, R.O.C  
TEL:+886-4-2359-0668  
FAX:+886-4-2359-1337  
E-MAIL:sales@pduke.com  
WEB:www.pduke.com

## U.S.A Subsidiary

P-DUKE Technology, Inc.  
717 Brea Canyon Road, Suite#1 Walnut, CA 91789  
TEL:+1-909-5985000  
FAX:+1-909-5985705  
E-MAIL:sales-usa@pduke.com

Please Contact Local Distributor or visit our website