



# P-DUKE POWER

## DU1P0 Series


Unregulated DC-DC Converter  
1 Watts Output Power

### 3

YEARS  
WARRANTY

ROHS  
COMPLIANT

REACH  
COMPLIANT



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway



3000  
VDC  
Reinforced  
Insulation

### PART NUMBER STRUCTURE

DU1P0 -	05	S	05	N
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Isolation Options
	05:4.5~5.5 12:10.8~13.2 15:13.5~16.5 24:21.6~26.4	S:Single  D: Dual	05:5 12:12 15:15  05:±5 12:±12 15:±15	□:Standard 1000VDC isolation N:3000VDC isolation

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current		Input Current @ No Load	Efficiency	Maximum Capacitor Load
			@Min.Load	@FullLoad			
	VDC	VDC	mA	mA	mA	%	μF
DU1P0-05S05	4.5 ~ 5.5	5	20	200	42	77	330
DU1P0-05S12	4.5 ~ 5.5	12	8.3	83	32	82	330
DU1P0-05S15	4.5 ~ 5.5	15	6.7	67	35	81	330
DU1P0-05D05	4.5 ~ 5.5	± 5	± 10	± 100	40	78	±150
DU1P0-05D12	4.5 ~ 5.5	± 12	± 4.2	± 42	35	82	±150
DU1P0-05D15	4.5 ~ 5.5	± 15	± 3.3	± 33	40	81	±150
DU1P0-12S05	10.8 ~ 13.2	5	20	200	17	77	330
DU1P0-12S12	10.8 ~ 13.2	12	8.3	83	17	82	330
DU1P0-12S15	10.8 ~ 13.2	15	6.7	67	18	79	330
DU1P0-12D05	10.8 ~ 13.2	± 5	± 10	± 100	18	77	±150
DU1P0-12D12	10.8 ~ 13.2	± 12	± 4.2	± 42	18	81	±150
DU1P0-12D15	10.8 ~ 13.2	± 15	± 3.3	± 33	18	82	±150
DU1P0-15S05	13.5 ~ 16.5	5	20	200	20	73	330
DU1P0-15S12	13.5 ~ 16.5	12	8.3	83	18	79	330
DU1P0-15S15	13.5 ~ 16.5	15	6.7	67	18	80	330
DU1P0-15D05	13.5 ~ 16.5	± 5	± 10	± 100	18	75	±150
DU1P0-15D12	13.5 ~ 16.5	± 12	± 4.2	± 42	16	80	±150
DU1P0-15D15	13.5 ~ 16.5	± 15	± 3.3	± 33	16	80	±150
DU1P0-24S05	21.6 ~ 26.4	5	20	200	12	72	330
DU1P0-24S12	21.6 ~ 26.4	12	8.3	83	12	78	330
DU1P0-24S15	21.6 ~ 26.4	15	6.7	67	10	78	330
DU1P0-24D05	21.6 ~ 26.4	± 5	± 10	± 100	12	75	±150
DU1P0-24D12	21.6 ~ 26.4	± 12	± 4.2	± 42	10	78	±150
DU1P0-24D15	21.6 ~ 26.4	± 15	± 3.3	± 33	10	79	±150

INPUT SPECIFICATIONS						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Operating input voltage range	5Vin(nom)	4.5	5	5.5	VDC	
	12Vin(nom)	10.8	12	13.2		
	15Vin(nom)	13.5	15	16.5		
	24Vin(nom)	21.6	24	26.4		
Input filter		C type				

OUTPUT SPECIFICATIONS						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Voltage accuracy		-5.0		+5.0	%	
Line regulation	Low Line to High Line at Full Load	1.3%,max / 1% of Vin				
Load regulation	20% to 100% Load	5Vout		+10	%	
		Others	-10	+8		
Ripple and noise	Measured by 20MHz bandwidth		100		mVp-p	
Temperature coefficient		-0.1		+0.1	%/°C	
Short circuit protection		1 Second, max.				


**GENERAL SPECIFICATIONS**

Parameter	Conditions			Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	Standard type Suffix "N" (Reinforced insulation)	1000			VDC
Isolation resistance	500VDC			1			GΩ
Isolation capacitance						30	pF
Switching frequency				60			kHz
Safety approvals	IEC/ EN/ UL62368-1					UL:E193009 CB:UL(Demko)	
Case material				Non-conductive black plastic			
Base material				None			
Potting material				Epoxy (UL94 V-0)			
Weight				2.0g (0.071oz)			
MTBF	MIL-HDBK-217F, Full load			2.019 x 10 <sup>7</sup> hrs			


**ENVIRONMENTAL SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-25		+100	°C
Maximum case temperature				100	°C
Storage temperature range		-55		+125	°C
Thermal shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity				5% to 95% RH	


**CAUTION:** This power module is not internally fused. An input line fuse must always be used.

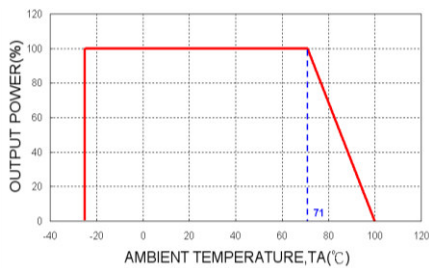**CHARACTERISTIC CURVE**


DU1P0-12S05 Derating Curve

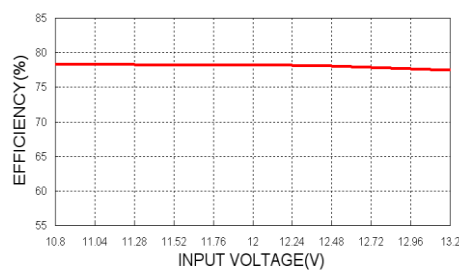

DU1P0-12S05 Efficiency vs. Input Voltage

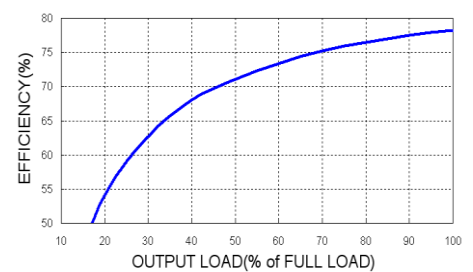

DU1P0-12S05 Efficiency vs. Output Load

## FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
DU1P0-05S□□ \ DU1P0-05D□□	0.63	Slow-Blow
DU1P0-12S□□ \ DU1P0-12D□□	0.315	Slow-Blow
DU1P0-15S□□ \ DU1P0-15D□□	0.315	Slow-Blow
DU1P0-24S□□ \ DU1P0-24D□□	0.315	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

## MECHANICAL DRAWING

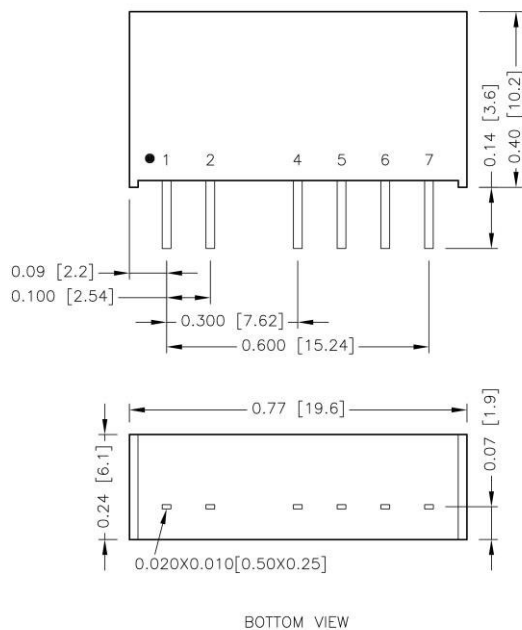

### PIN CONNECTION STANDARD


PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
4	-Vout	-Vout
5	NC	Common
6	+Vout	+Vout
7	No Pin	No Pin

### SUFFIX "N"

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
4	No Pin	No Pin
5	-Vout	-Vout
6	NC	Common
7	+Vout	+Vout

- All dimensions in inch [mm]
- Tolerance :x.xx±0.02 [x.x±0.5]  
x.xxx±0.01 [x.xx±0.25]
- Pin pitch tolerance ±0.01 [0.25]
- Pin dimension tolerance ±0.004[0.10]

**RECOMMENDED PAD LAYOUT**

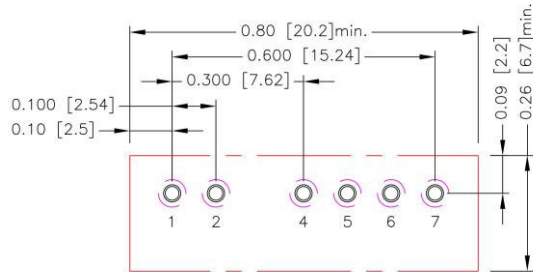


All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Through hole 1.2.4.5.6.7:  $\Phi 0.031[0.80]$   
 Top view pad 1.2.4.5.6.7:  $\Phi 0.039[1.00]$   
 Bottom view pad 1.2.4.5.6.7:  $\Phi 0.063[1.60]$

**THERMAL CONSIDERATIONS**

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).



TOP VIEW