



P-DUKE POWER

MPK06 Series

DC-DC Converter
Up to 6 Watts

5

YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Medical



PV



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Railway

UL US CB CE

2
x
MOPP

5000
VAC
Reinforced
Insulation

2 : 1
Input
Range

Internal
EN55032
Class
Filter **A**

LOW
Leakage
Current

LOW
Standby
Power

NO
Min. Load
Required

Operating
Altitude
5000
meter

OCP

OVP

SCP

UVP

PART NUMBER STRUCTURE

Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Pin Connection Options	Trim Options
MPK06 -	48	S	05	A	T
	12:9~18 24:18~36 48:36~75	S:Single D: Dual	05:5 12:12 15:15 05:±5 12:±12 15:±15	A: A type(Standard) B: B type	□:No Trim T:Trim (Only for B type Pin connection)

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
MPK06-12S05A/B	9 ~ 18	5	1200	10	84	1500
MPK06-12S12A/B	9 ~ 18	12	500	10	87	260
MPK06-12S15A/B	9 ~ 18	15	400	10	86	210
MPK06-12D05A/B	9 ~ 18	±5	±600	15	83	± 860
MPK06-12D12A/B	9 ~ 18	±12	±250	10	87	± 150
MPK06-12D15A/B	9 ~ 18	±15	±200	14	86	± 110
MPK06-24S05A/B	18 ~ 36	5	1200	6	84	1500
MPK06-24S12A/B	18 ~ 36	12	500	6	87	260
MPK06-24S15A/B	18 ~ 36	15	400	6	87	210
MPK06-24D05A/B	18 ~ 36	±5	±600	8	84	± 860
MPK06-24D12A/B	18 ~ 36	±12	±250	6	86	± 150
MPK06-24D15A/B	18 ~ 36	±15	±200	8	86	± 110
MPK06-48S05A/B	36 ~ 75	5	1200	4	84	1500
MPK06-48S12A/B	36 ~ 75	12	500	4	87	260
MPK06-48S15A/B	36 ~ 75	15	400	4	86	210
MPK06-48D05A/B	36 ~ 75	±5	±600	4	83	± 860
MPK06-48D12A/B	36 ~ 75	±12	±250	4	87	± 150
MPK06-48D15A/B	36 ~ 75	±15	±200	4	85	± 110

INPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range	12Vin(nom)		9	12	18	VDC
	24Vin(nom)		18	24	36	
	48Vin(nom)		36	48	75	
Start up voltage	12Vin(nom)				9	VDC
	24Vin(nom)				18	
	48Vin(nom)				36	
Shutdown voltage	12Vin(nom)		7	8	8.8	VDC
	24Vin(nom)		15	16	17.5	
	48Vin(nom)		31.5	33	34.5	
Start up time	Constant resistive load	Power up		35		ms
Input surge voltage	3 second, max.	12Vin(nom)			25	VDC
		24Vin(nom)			50	
		48Vin(nom)			100	
Input filter			Pi type			

OUTPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	Single	-0.2		+0.2	%
		Dual	-0.5		+0.5	
Load regulation	No Load to Full Load	Single	-0.2		+0.2	%
		Dual	-1.0		+1.0	
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0		+5.0	%
Voltage adjustability (Only for B-type Pin connection option)	Single output	5Vout, 12Vout	-10		+10	%
		15Vout	-10		+20	
Ripple and noise	Measured by 20MHz bandwidth With a 10μF/25V X7R MLCC	5Vout		50		mVp-p
		12Vout, 15Vout		75		
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		μs
Over voltage protection	Single	5Vout	5.6		7.0	VDC
		12Vout	13.5		16	
		15Vout	18.3		22.0	
	Dual	5Vout	5.6		7.0	VDC
12Vout	13.5		18.2			
15Vout	17.0		22.0			
Over load protection	% of Iout rated; Hiccup mode			150		%
Short circuit protection			Continuous, automatic recovery			

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Input to Output Reinforced insulation for 250VAC working voltage	5000			VAC
Isolation resistance	500VDC	10			GΩ
Isolation capacitance			15	17	pF
Leakage current	240VAC,60Hz			2	μA
Switching frequency		225	250	275	kHz
Clearance/Creepage		8			mm
Safety approvals	IEC/ EN/ ANSI/AAMI ES 60601-1 IEC/ EN/ UL 62368-1				UL:E360199 UL:E193009 CB:UL(Demko)
Case material					Non-conductive black plastic
Base material					Non-conductive black plastic
Potting material					Silicone (UL94 V-0)
Weight					13.5g(0.47oz)
MTBF	MIL-HDBK-217F, Full load				3.942 x 10 ⁶ hrs


ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+105	°C
Maximum case temperature				105	°C
Storage temperature range		-55		+125	°C
Thermal impedance			18		°C/W
Operating altitude				5000	m
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH


EMC SPECIFICATIONS		
Parameter	Conditions	Level
EMI	EN55011, EN55032, EN60601-1-2	
	Without external filter	Class A
	With external filter	Class B
EMS	EN55035 and EN60601-1-2	
ESD	EN61000-4-2 Air $\pm 15\text{kV}$ and Contact $\pm 8\text{kV}$	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 $\pm 2\text{kV}$	Perf. Criteria A
	MPK06-12□□□□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KZN series, 3300 $\mu\text{F}/25\text{V}$) and a TVS (SMBJ28A, 28V, 600Watt peak pulse power) in parallel.	
	MPK06-24□□□□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KZN series, 1200 $\mu\text{F}/50\text{V}$) and a TVS (SMBJ58A, 58V, 600Watt peak pulse power) in parallel.	
Surge	EN61000-4-5 $\pm 2\text{kV}$	Perf. Criteria A
	MPK06-12□□□□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KZN series, 3300 $\mu\text{F}/25\text{V}$) and a TVS (SMBJ28A, 28V, 600Watt peak pulse power) in parallel.	
	MPK06-24□□□□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KZN series, 1200 $\mu\text{F}/50\text{V}$) and a TVS (SMBJ58A, 58V, 600Watt peak pulse power) in parallel.	
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

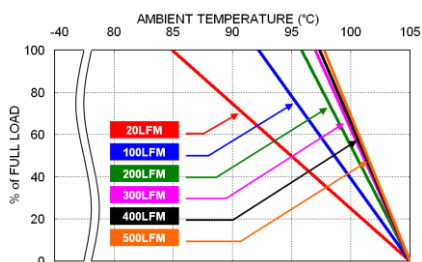

MPK06-48S05A Derating Curve

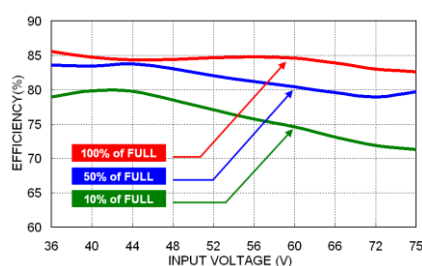

MPK06-48S05A Efficiency vs. Input Voltage

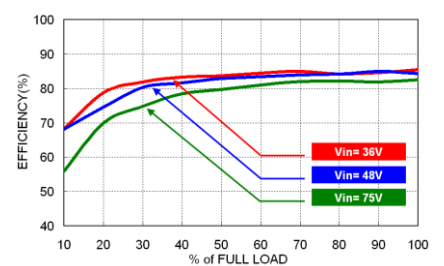

MPK06-48S05A Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
MPK06-12S□□、MPK06-12D□□	1.25	Slow-Blow
MPK06-24S□□、MPK06-24D□□	0.63	Slow-Blow
MPK06-48S□□、MPK06-48D□□	0.315	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

A TYPE

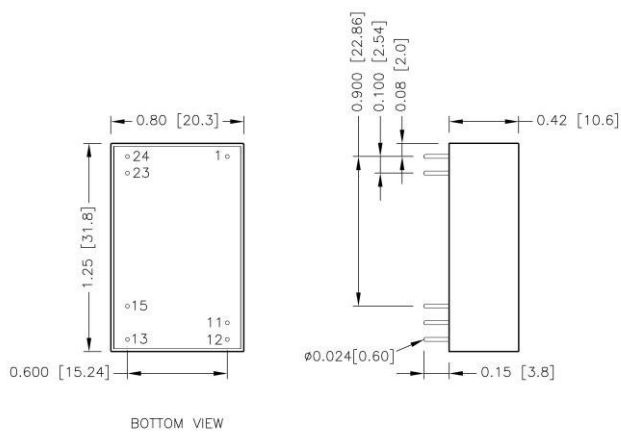


PIN CONNECTION

PIN	SINGLE	DUAL
1	+ Vin	+ Vin
11	No pin	Common
12	-Vout	No pin
13	+Vout	-Vout
15	No pin	+Vout
23	- Vin	- Vin
24	- Vin	- Vin

- All dimensions in inch [mm]
- Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]
- Pin dimension tolerance ±0.004[0.10]

B TYPE

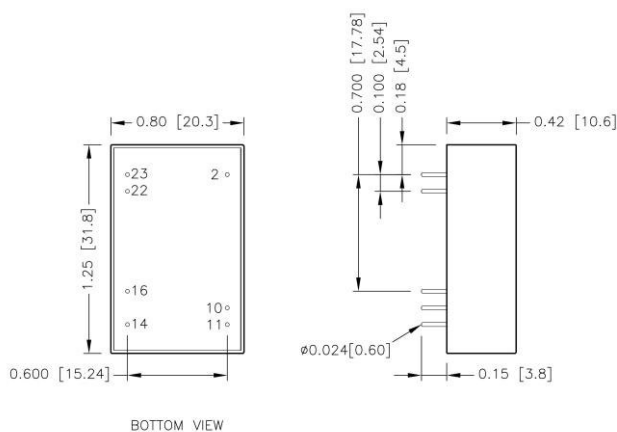

PIN CONNECTION

PIN	SINGLE	DUAL
2	- Vin	- Vin
10	Trim (Option) / No pin*	Trim (Option) / No pin*
11	No pin / NC **	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin


* If don't choose Trim option, there is no pin on the corresponding pin number.

** Pin 11 is "No pin" for MPK06-□□S□□**B-I**
Pin 11 is "NC" for MPK06-□□S□□**B**

- All dimensions in inch [mm]
- Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
- Pin dimension tolerance ±0.004[0.10]


RECOMMENDED PAD LAYOUT

A TYPE

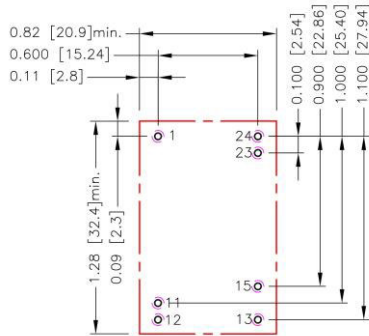

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.11.12.13.15.23.24: $\Phi 0.035[0.90]$
 Top view pad 1.11.12.13.15.23.24: $\Phi 0.044[1.13]$
 Bottom view pad 1.11.12.13.15.23.24: $\Phi 0.071[1.80]$

B TYPE

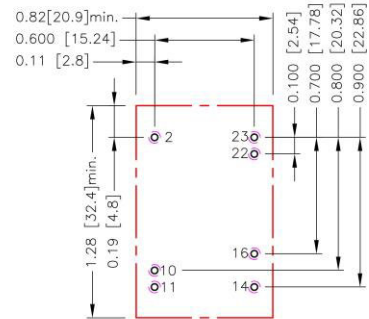


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 2.10.11.14.16.22.23: $\Phi 0.035[0.90]$
 Top view pad 2.10.11.14.16.22.23: $\Phi 0.044[1.13]$
 Bottom view pad 2.10.11.14.16.22.23: $\Phi 0.071[1.80]$

- * There should be at least 8mm distance between primary and secondary circuit.
- ** For further information, please contact P-DUKE.

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

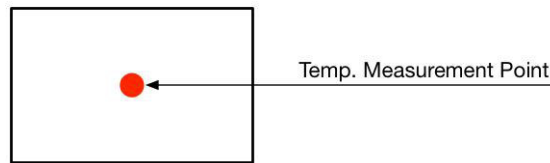

TOP VIEW

OUTPUT VOLTAGE ADJUSTMENT

It allows the user to increase or decrease the output voltage of the module.

This is accomplished by connecting an external resistor between the Trim pin and either the +Vout or -Vout pins.

With an external resistor between the Trim and -Output pin, the output voltage increases.

With an external resistor between the Trim and +Output pin, the output voltage decreases.

The external Trim resistor needs to be at least 1/16W of rated power.

Trim Up Equation

$$R_U = \left[\frac{G \times L}{(V_{o,up} - L - K)} - H \right] \Omega$$

Trim Down Equation

$$R_D = \left[\frac{(V_{o,down} - L) \times G}{(V_o - V_{o,down})} - H \right] \Omega$$

Trim constants

Module	G	H	K	L
□□S05B-T	5110	2050	2.5	2.5
□□S12B-T	10000	5110	9.5	2.5
□□S15B-T	10000	5110	12.5	2.5


Module	G	H	K	L
□□D05B-T	3000	3000	7.5	2.5
□□D12B-T	56000	13000	21.5	2.5
□□D15B-T	30000	13000	27.5	2.5

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up

Single Output




□□S05B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
R _U (kΩ)	253.450	125.700	83.117	61.825	49.050	40.533	34.450	29.888	26.339	23.500

□□S12B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
R _U (kΩ)	203.223	99.057	64.334	46.973	36.557	29.612	24.652	20.932	18.038	15.723

Dual Output



□□S15B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
R _U (kΩ)	161.557	78.223	50.446	36.557	28.223	22.668	18.700	15.723	13.409	11.557

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	16.650	16.800	16.950	17.100	17.250	17.400	17.550	17.700	17.850	18.000
R _U (kΩ)	10.042	8.779	7.711	6.795	6.001	5.307	4.694	4.149	3.662	3.223

□□D05B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	±5.050	±5.100	±5.150	±5.200	±5.250	±5.300	±5.350	±5.400	±5.450	±5.500
R _U (kΩ)	72.000	34.500	22.000	15.750	12.000	9.500	7.714	6.375	5.333	4.500

□□D12B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	±12.120	±12.240	±12.360	±12.480	±12.600	±12.720	±12.840	±12.960	±13.080	±13.200
R _U (kΩ)	570.333	278.667	181.444	132.833	103.667	84.222	70.333	59.917	51.815	45.333


□□D15B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	±15.150	±15.300	±15.450	±15.600	±15.750	±15.900	±16.050	±16.200	±16.350	±16.500
R _U (kΩ)	237.000	112.000	70.333	49.500	37.000	28.667	22.714	18.250	14.778	12.000

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down

Single & Dual Output


 S05B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD (k Ω)	248.340	120.590	78.007	56.715	43.940	35.423	29.340	24.778	21.229	18.390

 S12B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD (k Ω)	776.557	380.723	248.779	182.807	143.223	116.834	97.985	83.848	72.853	64.057

 S15B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD (k Ω)	818.223	401.557	262.668	193.223	151.557	123.779	103.938	89.057	77.483	68.223

 D05B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	± 4.950	± 4.900	± 4.850	± 4.800	± 4.750	± 4.700	± 4.650	± 4.600	± 4.550	± 4.500
RD (k Ω)	219.000	106.500	69.000	50.250	39.000	31.500	26.143	22.125	19.000	16.500

 D12B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	± 11.880	± 11.760	± 11.640	± 11.520	± 11.400	± 11.280	± 11.160	± 11.040	± 10.920	± 10.800
RD (k Ω)	4947.667	2439.333	1603.222	1185.167	934.333	767.111	647.667	558.083	488.407	432.667

 D15B-T

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	± 14.850	± 14.700	± 14.550	± 14.400	± 14.250	± 14.100	± 13.950	± 13.800	± 13.650	± 13.500
RD (k Ω)	2707.000	1332.000	873.667	644.500	507.000	415.333	349.857	300.750	262.556	232.000