




3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

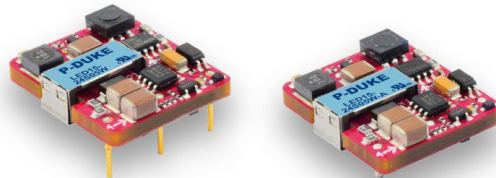

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway



2250
VDC
Isolation
Voltage

4 : 1
Wide
Input
Range

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

OVP

SCP

UVP

PART NUMBER STRUCTURE

LED15	-	48	S	05	W	-	A
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Options

24:	9~36	S:	Single	3P3:	3.3	4:1
48:	18~75			05:	5	
				12:	12	
				15:	15	

- : Negative logic remote ON/OFF with DIP(Standard)
- A: Negative logic remote ON/OFF with SMD
- B: Positive logic remote ON/OFF with DIP
- C: Positive logic remote ON/OFF with SMD
- D: DIP type without Ctrl pin
- E: SMD type without Ctrl pin
- F: DIP type, negative logic remote ON/OFF without Trim pin
- G: SMD type, negative logic remote ON/OFF without Trim pin
- H: DIP type without Ctrl & Trim pin
- I: SMD type without Ctrl & Trim pin
- J: DIP type, positive logic remote ON/OFF without Trim pin
- K: SMD type, positive logic remote ON/OFF without Trim pin

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	Ma	Ma	%	Mf
LED15-24S3P3W	9 ~ 36	3.3	4000	60	85	12000
LED15-24S05W	9 ~ 36	5	3000	70	87	6000
LED15-24S12W	9 ~ 36	12	1300	10	86	1000
LED15-24S15W	9 ~ 36	15	1000	10	86	660
LED15-48S3P3W	18 ~ 75	3.3	4000	40	85	12000
LED15-48S05W	18 ~ 75	5	3000	40	87	6000
LED15-48S12W	18 ~ 75	12	1300	10	86	1000
LED15-48S15W	18 ~ 75	15	1000	10	86	660

INPUT SPECIFICATIONS							
Parameter	Conditions			Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom)			9	24	36	VDC
	48Vin(nom)			18	48	75	
Start up voltage	24Vin(nom)						VDC
	48Vin(nom)			9			
Shutdown voltage	24Vin(nom)			7	8	8.8	VDC
	48Vin(nom)			14.5	16	17.5	
Start up time	Constant resistive load	Power up			30		
		Remote ON/OFF			30		
Input surge voltage	100ms, max.	24Vin(nom)			50		
		48Vin(nom)			100		
Remote ON/OFF	Referred to -Vin pin	Positive logic	DC-DC ON	Open or 3 ~ 15VDC			Ma
		(Option)	DC-DC OFF	Short or 0 ~ 1.2VDC			
		Negative logic	DC-DC ON	Short or 0 ~ 1.2VDC			
		(Standard)	DC-DC OFF	Open or 3 ~ 15VDC			
		Input current of Ctrl pin		-0.5		1.0	
Remote off input current				2.5		Ma	

OUTPUT SPECIFICATIONS							
Parameter	Conditions			Min.	Typ.	Max.	Unit
Voltage accuracy				-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load			-0.2		+0.2	%
Load regulation	No Load to Full Load			-0.2		+0.2	%
Voltage adjustability				-10		+10	%
Ripple and noise	Measured by 20MHz bandwidth, With a 1Mf M/C X7R and a 10Mf T/C				100		mVp-p
Temperature coefficient				-0.02		+0.02	%/°C
Transient response recovery time	25% load step change				250		µs
Over voltage protection	3.3Vout			3.7		5.4	VDC
	5Vout			5.6		7.0	
	12Vout			13.8		17.5	
	15Vout			16.8		20.5	
Over load protection	% of lout rated; Hiccup mode				150		%
Short circuit protection							Continuous, automatics recovery

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Input to Output	2250			VDC
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				1500	Pf
Switching frequency	3.3Vout, 5Vout 12Vout, 15Vout	315 360	350 400	385 440	kHz
Safety approvals	IEC/ EN/ UL62368-1			UL:E193009 CB:UL(Demko)	
Weight				10.5g (0.36oz)	
MTBF	MIL-HDBK-217F, Full load			2.444 x 10 ⁶ hrs	

ENVIRONMENTAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+120	°C
Maximum case temperature				120	°C
Storage temperature range		-55		+125	°C
Thermal shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity				5% to 95% RH	
Moisture sensitivity level(MSL)	Only for SMD type Verification according to IPC J-STD-020E			IPC J-STD-033C Level 2a	
Lead-free reflow solder process	Only for SMD type			The time above 217°C 30~60sec. Peak temperature 245°C max. Time above 240°C 10sec. max.	

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI	EN55032 With external components	Class A, Class B
EMS	EN55035	
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge	EN61000-4-5 With an external input filter capacitor (Nippon chemi-con KY series, 220μF/100V) ± 1kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 With an external input filter capacitor (Nippon chemi-con KY series, 220μF/100V) 3 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

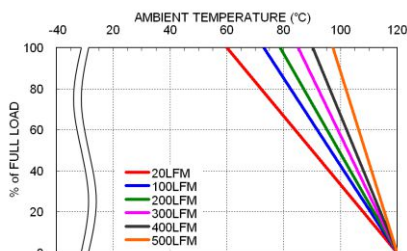

LED15-48S05W Derating Curve

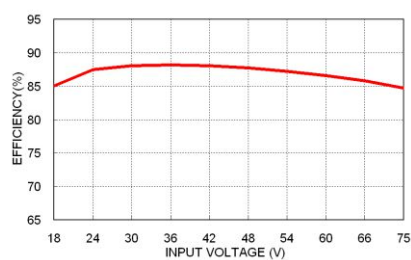

LED15-48S05W Efficiency vs. Input Voltage

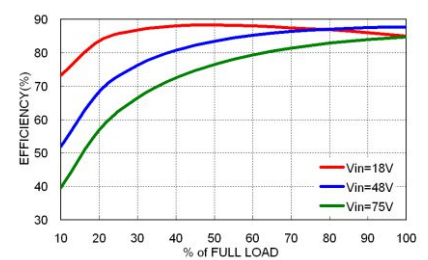

LED15-48S05W Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
LED15-24□□□W	3.15	Slow-Blow
LED15-48□□□W	1.6	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low V_{in} .

MECHANICAL DRAWING

DIP TYPE

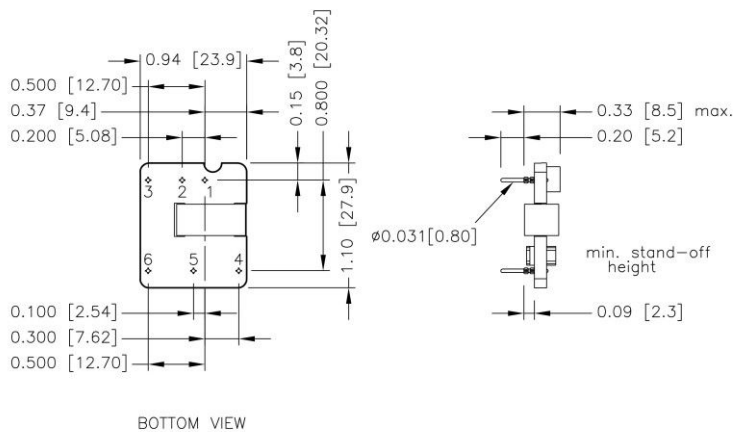



PIN CONNECTION

PIN	DEFINE
1	+Vin
2	-Vin
3	Ctrl
4	+Vout
5	Trim
6	-Vout


- All dimensions in inch [mm]
- Tolerance : $x.xx \pm 0.02$ [$x.x \pm 0.5$]
 $x.xxx \pm 0.01$ [$x.xx \pm 0.25$]
- Pin dimension tolerance ± 0.004 [0.10]

SMD TYPE

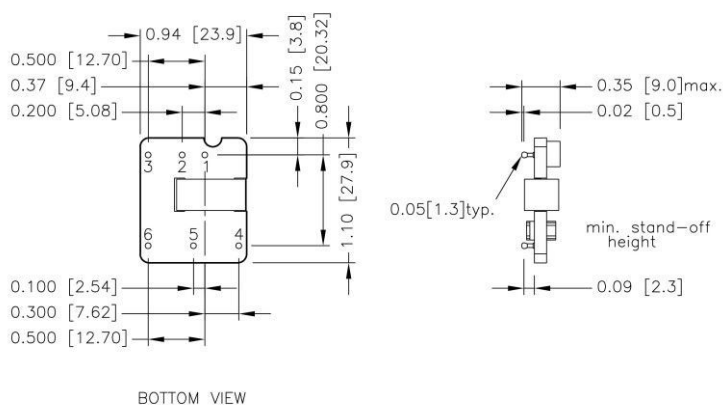

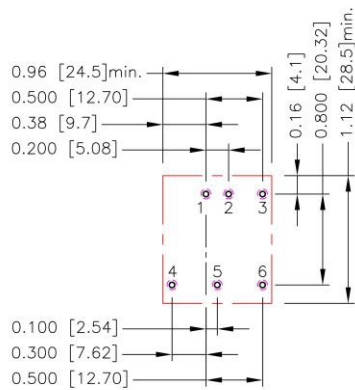RECOMMENDED PAD LAYOUT
DIP TYPE


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.4.5.6: $\Phi 0.043$ [1.10]
 Top view pad 1.2.3.4.5.6: $\Phi 0.054$ [1.38]
 Bottom view pad 1.2.3.4.5.6: $\Phi 0.087$ [2.20]

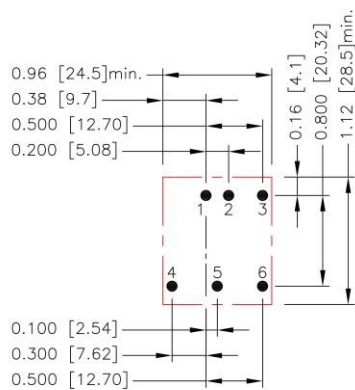SMD TYPE


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Top view pad: $\Phi 0.091$ [2.30]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding environment.


Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".

When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature".

You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

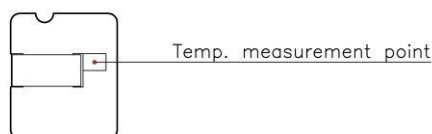

TOP VIEW

OUTPUT VOLTAGE ADJUSTMENT

Output voltage set point adjustment allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Output or -Output pins. With an external resistor between the Trim and -Output pin, the output voltage set point increases. With an external resistor between the Trim and +Output pin, the output voltage set point decreases. The external Trim resistor needs to be at least 1/16W of rated power.

Trim Up Equation

$$R_U = \left[\frac{G \times L}{(V_{o,up} - L - K)} - H \right] \Omega$$

Trim Down Equation

$$R_D = \left[\frac{(V_{o,down} - L) \times G}{(V_o - V_{o,down})} - H \right] \Omega$$


Trim constants

Module	G	H	K	L
LED15-□□S3P3W	5110	2050	0.8	2.5
LED15-□□S05W	5110	2050	2.5	2.5
LED15-□□S12W	10000	5110	9.5	2.5
LED15-□□S15W	10000	5110	12.5	2.5

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



□□S3P3W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU (kΩ)	385.071	191.511	126.990	94.730	75.374	62.470	53.253	46.340	40.963	36.662

□□S05W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
RU (kΩ)	253.450	125.700	83.117	61.825	49.050	40.533	34.450	29.888	26.339	23.500

□□S12W


ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
RU (kΩ)	203.223	99.057	64.334	46.973	36.557	29.612	24.652	20.932	18.038	15.723

□□S15W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
RU (kΩ)	161.557	78.223	50.446	36.557	28.223	22.668	18.700	15.723	13.409	11.557

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down



□□S3P3W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
RD (k Ω)	116.719	54.779	34.133	23.810	17.616	13.486	10.537	8.325	6.604	5.228

□□S05W


ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD (k Ω)	248.340	120.590	78.007	56.715	43.940	35.423	29.340	24.778	21.229	18.390

□□S12W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD (k Ω)	776.557	380.723	248.779	182.807	143.223	116.834	97.985	83.848	72.853	64.057

□□S15W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD (k Ω)	818.223	401.557	262.668	193.223	151.557	123.779	103.938	89.057	77.483	68.223

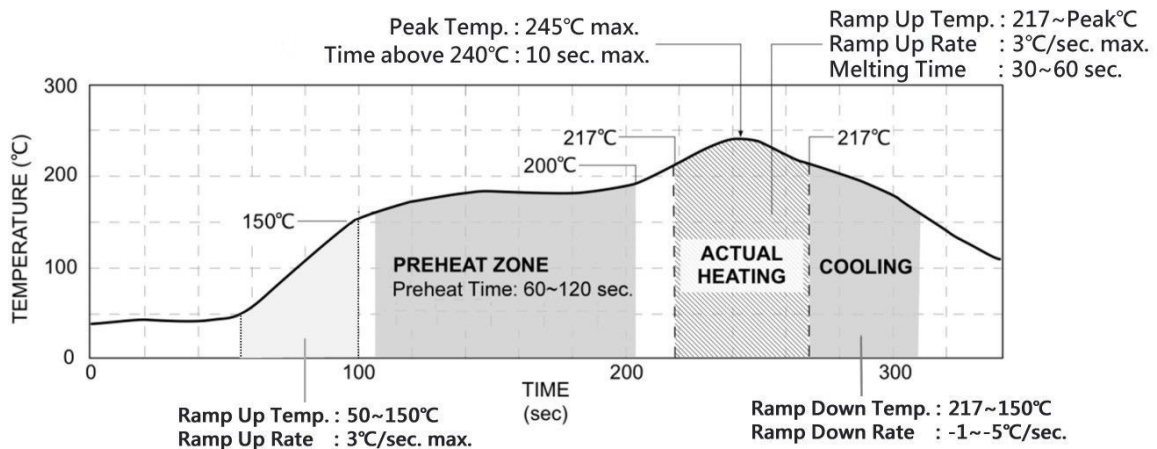LEAD FREE REFLOW PROFILE For SMD Type


*The curves define the maximum peak reflow temperature permissible measured on pin1 or Vin pin.